


# TRACEABLE® DOUBLE DISPLAY TIMER INSTRUCTIONS

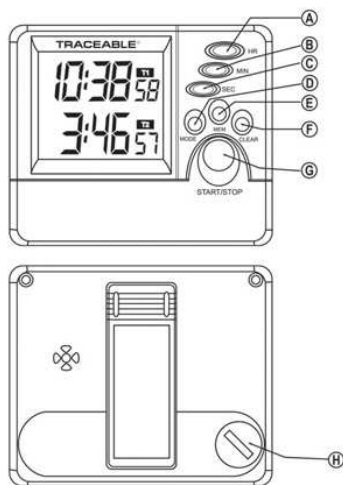

## DESCRIPTION AND FUNCTION OF PARTS

### A. [HR] BUTTON

Press this button to set the hour digits, holding down this button will increase the value rapidly.

### B. [MIN] BUTTON

Press this button to set the minute digits, holding down this button will increase the value rapidly.

### C. [SEC] BUTTON

Press this button to set the second digits; holding down this button will increase the value rapidly.

### D. [MODE] BUTTON

Press this button to select timer or to display clock & count up.

Press to select: Timer 1 (T1) ► Timer 2 (T2) ► Clock & Count Up ► Return to T1.

### E. [MEM] BUTTON

Under clock mode, press and hold it to set clock.

Under timer mode, press it to recall the pre-set value or press and hold it to set the timer memory.

### F. [CLEAR] BUTTON

Press this button to clear the timer value to 0:00:00

### G. [START/STOP] BUTTON

Press this button to start, pause or stop the timer.

### H. BATTERY COMPARTMENT

One 1.5V AAA size battery.

## HOW TO SET TIMER

This timer will count down from a maximum time of 19H59M59S to zero. Once it reaches zero, the timer will start to blink and automatically start counting up to show how much time has elapsed since the alarm started sounding; and the alarm will sound for 1 minute to alert you.

- Press the [MODE] button to select T1 or T2.
- Set the timer by pressing the [HR] button to change the hour digits, [MIN] button to change the minute digits and [SEC] button to change the second digits; holding down the button will change the value rapidly.
- Press the [START/STOP] button to start/pause/stop the timer.
- Once the timer reaches zero, you can press the [START/STOP] button to stop the alarm. If you do not stop the alarm, the timer will start to blink and automatically start counting up (the "OT" icon will be displayed) to show how much time has passed since the alarm started sounding, you can press the [START/STOP] button to stop this over time counting.
- Press the [CLEAR] button to reset the timer to 0:00:00.
- Timer 1 and Timer 2 can be operated individually or simultaneously (please refer to point 6).

## HOW TO SET MEMORY

- Press the [MODE] button to select T1 or T2.
- Press and hold the [MEM] button to enter the memory setting mode, the timer and the corresponding icon will start to flash.
- Set the timer by pressing the [HR] button to change the hour, [MIN] button to change the minute and [SEC] button to change the second; holding down the button will change the value rapidly. **OR** you can press the [CLEAR] button to clear the memory.
- Press the [MEM] button to confirm and exit.
- You can recall this memory by pressing the [MEM] button; the "M" icon will be displayed to indicate the time is recalled from the memory.

**NOTE:** If the main unit idles for 6 seconds during setting, it will exit the setting mode and return to normal display.

## HOW TO OPERATE THE COUNT DOWN TIMERS SIMULTANEOUSLY

After setting all the timers, you can press the [MODE] and [START/STOP] button together to start all the count down timers at once, press these buttons together again to stop all timers.

## HOW TO SET TIME

- Press the [MODE] button to display the Clock & Count Up.
- Press and hold the [MEM] button to enter the clock setting mode, the clock digit and the "C" will start to flash.
- Set the time by pressing the [HR] button to change the hour, [MIN] button to change the minute and [SEC] button to change the second; holding down the button will change the value rapidly.

**NOTE:** If the main unit idles for 6 seconds during setting, it will exit the setting mode and return to normal display.

## COUNT UP (STOPWATCH) FUNCTION

The unit is also equipped with a count up timer (stopwatch), press the [MODE] button to display the Clock & Count Up, then press the [START/STOP] button to start the stopwatch counting, press it again to pause/stop the counting. You can press the [CLEAR] button to reset the count up timer to 0:00:00.

## BATTERY INSTALLATION

- Locate the battery cover at the back of the timer.
- Use a coin carefully twist open the battery door.
- Insert one 'AAA' size battery, make sure the "+" and "-" marks on the battery match the diagram inside the battery compartment then twist close the battery door.
- After the battery is installed, the T1 icon will flash and 0:00:00 will be displayed on the screen.

## Warranty, Service, or Recalibration

For warranty, service, or recalibration, contact:

## CONTROL COMPANY

4455 Rex Road  
Friendswood, Texas 77546 USA  
Ph. 281-482-1714 Fax 281-482-9448  
E-mail sales@control3.com  
www.control3.com

Control Company is ISO 9001 Quality-Certified by DNV and ISO 17025 accredited as a Calibration Laboratory by A2LA.

Traceable® is a registered trademark of © Control Company  
©2008 © Control Company. 92-5127-00 Rev. 2 040808